

WELCOME TO THE FUTURE OF CYBER SECURITY

26000 SECURITY GATEWAY



Ready to battle any threat, from small to the fifth generation large scale and multi-vector attacks, our security gateways provide superior threat prevention and a unified security management. Turbo charge your enterprise with Check Point 26000 Next Generation Firewalls that combine the most comprehensive protections with data center-grade security and hardware to maximize uptime and performance for securing large enterprise and data center environments.



Highest Security Effectiveness

Integrated with R80.30 and ThreatCloud setting a new standard of prevention against advanced 5th generation cyber attacks



State-of-the-Art SSL Inspection

Threat Prevention that delivers lightning fast SSL-encrypted traffic inspection without compromising up time or scalability



1 Tbps of Gen V Performance

Hyperscale ready, high performance threat prevention hardware for the fastest Gen V security gateway in the industry

PERFORMANCE HIGHLIGHTS

	Gen II Security Firewall	Gen III Security NGFW + IPS	Gen V Security Threat Prevention + SandBlast
Turbo	145 Gbps	51.5 Gbps	30 Gbps
Base, Plus	106.2 Gbps	40.5 Gbps	24 Gbps

Performance measured with enterprise test conditions.

WELCOME TO THE FUTURE OF CYBER SECURITY

26000

Data center grade security, performance and reliability

The Check Point 26000 Next Generation Security Gateway combines the most comprehensive security protections with data center grade hardware to maximize uptime while safeguarding enterprise and data center networks.

The 26000 is a 2U Next Generation Security Gateways with eight I/O expansion slots for high port capacity, redundant AC or DC power supplies and fans, a 2x 1TB HDD or 2x 480GB SSD RAID1 disk array, and Lights-Out Management (LOM) for remote management. If you're ready for 25, 40 or 100 GbE, so is the 26000 Next Generation Security Gateway with its 40 and 100/25 GbE IO card options.

Key Features & Benefits

- Advanced Threat Prevention 1st time prevention of known and zero-day threats
- Uncompromising Performance Achieve up to 30 Gbps of threat prevention throughput
- Secure Encrypted Traffic Consolidate SSL inspection into one integrated security platform



THE CYBER SECURITY ARCHITECTURE OF THE FUTURE

Data Center and High-End Enterprise Security Gateways

ONE SECURITY PLATFORM

Leveraging unified threat intelligence and open interfaces

REAL-TIME THREAT PREVENTION

Blocking the most sophisticated attacks before they infiltrate the network


CONSOLIDATED MANAGEMENT

Single management, modular policy management and integrated threat visibility

WELCOME TO THE FUTURE OF CYBER SECURITY

26000 SECURITY GATEWAY


- 1 Console port
- 2 Sync 10/100/1000Base-T RJ45
- 3 2 x 1TB HDD or 2x 480GB SSD RAID1
- 4 USB ports for ISO installation
- 5 Lights-Out Management port
- 6 Management 10/100/1000Base-T RJ45
- 7 Eight network card expansion slots

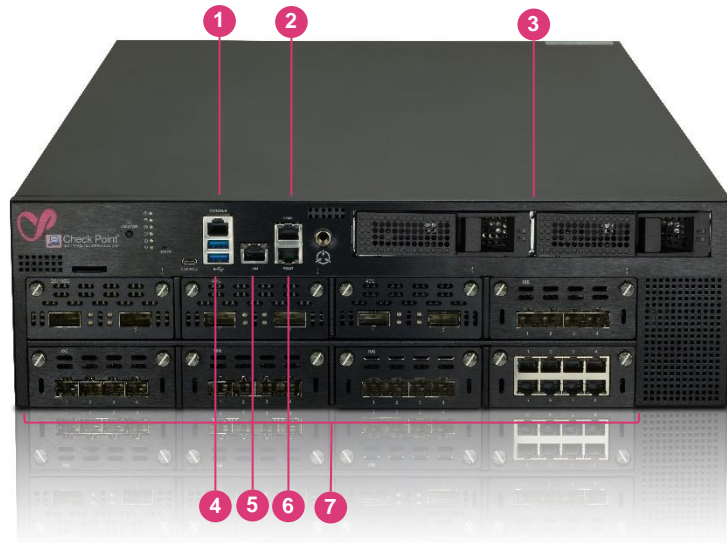

SPOTLIGHT

Prevent Known and Zero-day Threats

Zero-day protection offering network security with evasion-resistant malware detection and complete protection from the most advanced attacks, ensuring quick delivery of safe content to users.

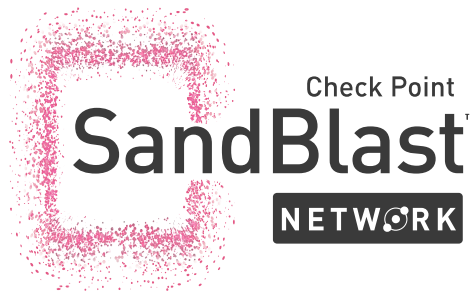

Complete Security: Simple Offering

Flexible cost-effective bundles. Subscription and support offered together for NGFW, NGTP or NGTX (sandboxing) in either direct or collaborative premium support for 1, 3 or 5 years.

High Performance Options

Purchase the affordable Plus package and get a base system plus three 4x 10Gb interface cards, transceivers, 3x AC power supplies, 2x 480 GB SSD drives and 96 GB of memory for high connection capacity. The Turbo includes a 2x 40Gb interface card.



100, 40 and 25 GbE Connectivity

If you're ready to move from 10 to 25, 40 or 100 GbE, so is the 26000 Next Generation Security Gateway. The 26000 Security Gateway lets you connect your 10 GbE server uplinks to your core network.

DATA CENTER GRADE PLATFORM

	1 GbE Copper	1 GbE Fiber	10 GbE	40 GbE	100/25 GbE	Memory	Redundant Storage	Redundant Power	LOM
Base model	10	0	0	0	0	48 GB	○	●	○
Plus model	10	0	12	0	0	96 GB	●	●	●
Turbo model	10	0	12	2	0	96 GB	●	●	●
Max capacity	66	32	32	16	16	128 GB	●	●	●

○ optional accessory

WELCOME TO THE FUTURE OF CYBER SECURITY

Performance

Enterprise Test Conditions		
	Base, Plus	Turbo
Threat Prevention ¹ (Gbps)	24	30
NGFW ² (Gbps)	40.5	51.5
IPS (Gbps)	43	52.2
Firewall (Gbps)	106.2	145
RFC 3511, 2544, 2647, 1242 PERFORMANCE (LAB)		
Firewall 1518B UDP (Gbps)	316.5	316.5
VPN AES-128 (Gbps)	40.1	49
Connections/sec	550,0000	615,000
Concurrent connections ³	10/20/32M ³	20/32M ³

1. Includes Firewall, Application Control, URL Filtering, IPS, Antivirus, Anti-Bot and SandBlast Zero-Day Protection.

2. Includes Firewall, Application Control and IPS. 3. Performance measured with Base/Plus/maximum or

Turbo/maximum memory.

Additional Features

Highlights

- 2x CPUs, 36 physical cores, 72 virtual cores (total)
- 2x 1TB HDD or 480GB SSD RAID1 storage
- 3x AC power supplies (DC option)
- 48, 96 and 128 GB memory options
- Lights-Out-Management card (optional in Base package)
- Virtual Systems (base/PLUS/max mem): 125/250/250

Network Expansion Slot Options (5 of 8 slots open)

- 1x 10/100/1000Base-T RJ45 port card, up to 66 ports
- 4x 1000Base-F SFP port card, up to 32 ports
- 4x 10GBase-F SFP+ port card, up to 32 ports
- 2x 40G QSFP+ port card, up to 16 ports
- 2x 100/25G QSFP28 port card, up to 16 ports

Content Security

First Time Prevention Capabilities

- CPU-level, OS-level and static file analysis
- File disarm and reconstruction via Threat Extraction
- Average emulation time for unknown files that require full sandbox evaluation is under 100 seconds
- Maximal file size for Emulation is 100 MB
- Emulation OS Support: Windows XP, 7, 8.1, 10

Applications

- Use 8,000+ pre-defined or customize your own applications
- Accept, prevent, schedule, and apply traffic-shaping

Data Loss Prevention

- Classify 700+ pre-defined data types
- End user and data owner incident handling

Content Security (continued)

Dynamic User-based Policy

- Integrates with Microsoft AD, LDAP, RADIUS, Cisco pxGrid, Terminal Servers and with 3rd parties via a Web API
- Enforce consistent policy for local and remote users on Windows, macOS, Linux, Android and Apple iOS platforms

Network

Network Connectivity

- Total physical and virtual (VLAN) interfaces per appliance: 1024/4096 (single gateway/with virtual systems)
- 802.3ad passive and active link aggregation
- Layer 2 (transparent) and Layer 3 (routing) mode

High Availability

- Active/Active L2, Active/Passive L2 and L3
- Session failover for routing change, device and link failure
- ClusterXL or VRRP

IPv6

- NAT66, NAT64, NAT46
- CoreXL, SecureXL, HA with VRRPv3

Unicast and Multicast Routing (see SK98226)

- OSPFv2 and v3, BGP, RIP
- Static routes, Multicast routes
- Policy-based routing
- PIM-SM, PIM-SSM, PIM-DM, IGMP v2, and v3

Physical

Power Requirements

- Single Power Supply rating AC: 850W, DC: 1300W
- Power input: 100 to 240V (47-53Hz), 40--72VDC
- Power consumption avg/max1: AC359/443W
- Maximum thermal output AC1: 1509 BTU/hr.

¹. base configuration, up to 1200W/4094 BTU/hr. with max config

Dimensions

- Enclosure: 3RU
- Dimensions (WxDxH): 17.4 x 24 x 5.2 in. (442 x 610 x 132mm)
- Weight: 46.3 lbs. (21 kg)

Environmental Conditions

- Operating: 0° to 40°C, humidity 5% to 95%
- Storage: -20° to 70°C, humidity 5% to 95% at 60°C

Certifications

- Safety: UL, CB, CE, TUV GS
- Emissions: FCC, CE, VCCI, RCM/C-Tick
- Environmental: RoHS, WEEE, REACH¹, ISO14001¹

¹. factory certificate

WELCOME TO THE FUTURE OF CYBER SECURITY

ORDERING 26000 SECURITY GATEWAYS

SECURITY APPLIANCE ¹	SKU
26000 Base configuration: 10x 1GbE copper ports, 48GB RAM, 1x 1TB HDD, 3x AC PSUs. The HDD option supports local/standalone management for 2 Gateways.	CPAP-SG26000
26000 Plus configuration: 10x 1GbE copper ports, 12x 10GbE SFP+ ports, 12x SR transceivers, 96GB RAM, 2x 480GB SSD, 3x AC PSUs, Lights-Out Management (LOM), 5 Virtual Systems.	CPAP-SG26000-PLUS
26000 Turbo configuration: 10x 1GbE copper ports, 12x 10GbE SFP+ ports, 2x 40GbE QSFP+ ports, 14x SR transceivers, 96GB RAM, 2x 480GB SSD, 3x AC PSUs, Lights-Out Management (LOM), 5 Virtual Systems.	CPAP-SG26000-TURBO

¹ 1, 3, and 5 year NGFW, NGTP and SandBlast (NGTX) packages with Direct Premium Support are available in the online product catalog.

INTERFACE CARDS AND TRANSCEIVERS	
8 Port 10/100/1000 Base-T RJ45 interface card	CPAC-8-1C-C
4 Port 1000Base-F SFP interface card; requires additional 1000Base SFP transceivers	CPAC-4-1F-C
SFP transceiver module for 1G fiber ports - long range (1000Base-LX)	CPAC-TR-1LX-C
SFP transceiver module for 1G fiber ports - short range (1000Base-SX)	CPAC-TR-1SX-C
SFP transceiver to 1000 Base-T RJ45 (Copper)	CPAC-TR-1T-C
4 Port 10GBase-F SFP+ interface card	CPAC-4-10F-C
SFP+ transceiver module for 10G fiber ports - long range (10GBase-LR)	CPAC-TR-10LR-C
SFP+ transceiver module for 10G fiber ports - short range (10GBase-SR)	CPAC-TR-10SR-C
10G Direct Attach Copper (DAC) Cable, one meter (10BASE-CU)	CPAC-DAC-10G-1M
10G Direct Attach Copper (DAC) Cable, three meters (10BASE-CU)	CPAC-DAC-10G-3M
2 Port 40G QSFP+ interface card	CPAC-2-40F-C
QSFP+ transceiver module for 40G fiber ports - short range (40GBase-SR)	CPAC-TR-40SR-QSFP-300m
QSFP+ transceiver module for 40G fiber ports - long range (40GBase-LR)	CPAC-TR-40LR-QSFP-10Km
40G Direct Attach Copper Cable, one meter (40BASE-CR4)	CPAC-DAC-40G-1M
40G Direct Attach Copper Cable, three meters (40BASE-CR4)	CPAC-DAC-40G-3M
2 Port 100/25G QSFP28 interface card	CPAC-2-100/25F
QSFP28 transceiver module for 100G fiber ports - short range (100GBase-SR4)	CPAC-TR-100SR
QSFP28 transceiver module for 100G fiber ports - long range (100GBase-LR4)	CPAC-TR-100LR
SFP28 transceiver module for 25G fiber ports with QSFP28 adaptor - short range (25GBase-SR)	CPAC-TR-25SR-ADP
SFP28 transceiver module for 25G fiber ports with QSFP28 adaptor - long range (25GBase-LR)	CPAC-TR-25LR-ADP
MEMORY	SKU
Memory upgrade kit from 48GB to 96GB for 26000 Security Gateways	CPAC-RAM48GB-26000
Memory upgrade kit from 96GB to 128GB for 26000 Security Gateways	CPAC-RAM32GB-26000
Memory upgrade kit from 48GB to 128GB for 26000 Security Gateways	CPAC-RAM80GB-26000
SPARES AND MISCELLANEOUS	SKU
1TB HDD for 16000/26000 Security Gateways	CPAC-HDD-1T-C
480GB SSD for 16000/26000 Security Gateways	CPAC-SSD-480G-C
AC power supply for 26000 Security Gateways	CPAC-PSU-AC-26000
Dual DC power supplies for 16000 and 26000 Security Gateways	CPAC-PSU-DC-Dual-16000/26000
DC power supply for 16000 and 26000 Security Gateways	CPAC-PSU-DC-16000/26000
Replacement Lights-Out Management Module	CPAC-LOM-C
Replacement Fan	CPAC-FAN-26000
Slide rails for 26000 Security Gateways (22" - 32")	CPAC-RAIL-L
Extended slide rails for 26000 Security Gateways (24" - 36")	CPAC-RAIL-EXT-L