



Quantum 6200 Hyperscale Security Gateway for Maestro



Top Security Effectiveness
 Leader with 99.7% malware block rate in Miercom NGFW Security Benchmark (2023)

AI ML powered Threat Prevention
 Protect networks and users from zero-days, phishing, DNS, and ransomware attacks

Hyperscale Network Security
 On-demand expansion and resilient access to mission-critical applications

Unified Management and Ops Efficiency
 Increase protection and reduce TCO with a consolidated security architecture

Industry Recognition
 Named a Leader for the 23rd time in the Gartner® Magic Quadrant™ for Network Firewalls
 Named a Leader in the Forrester Wave™ Enterprise Firewalls Q4 2022
 Awarded the Frost & Sullivan Firewall Company of the Year

Scalable, resilient AI Deep Learning powered threat prevention

The Maestro hyperscale network security solution orchestrates multiple Quantum firewalls as one unified system, with seamless and near limitless scaling. Bring scale, agility and elasticity of the cloud on premises with efficient N+1 clustering based on Check Point HyperSync technology.


Maestro Hyperscale Orchestrators distribute internal and external network traffic equally across multiple 6200 firewalls managed as a single group with a common security feature set and policy. With Maestro, businesses of all sizes can have cloud scale and agility with datacenter resiliency — all while maximizing cost efficiency.

PERFORMANCE HIGHLIGHTS

Firewall	Next Gen Firewall	Threat Prevention
9 Gbps	3.72 Gbps	1.8 Gbps

HIGH PERFORMANCE, SCALABLE SECURITY

6200 SECURITY GATEWAY

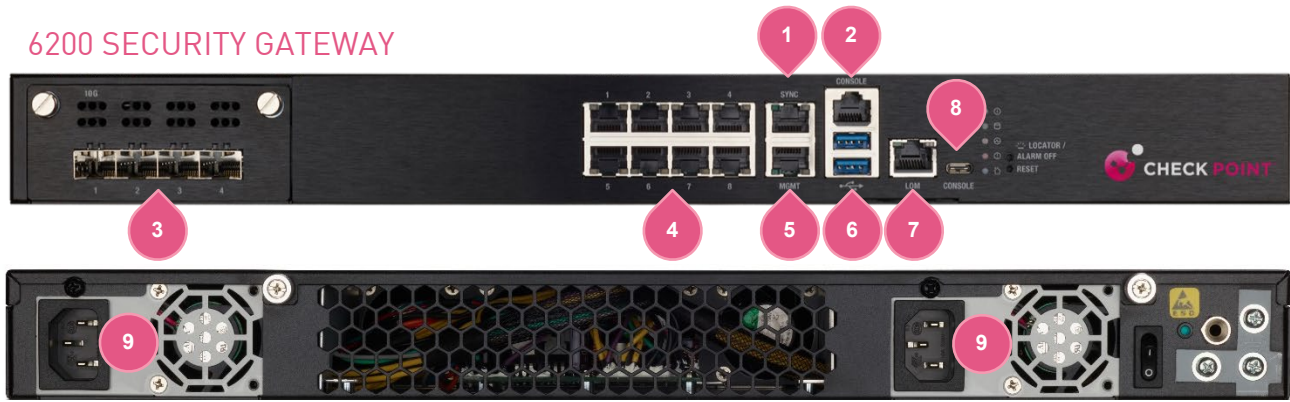


- | | |
|---------------------------------------|-------------------------------|
| 1. Sync 10/100/1000 Base-T port | 6. 2x USB 3.0 ports |
| 2. RJ45 console port | 7. Lights-out Management port |
| 3. 1 network expansion slot | 8. USB Type-C console port |
| 4. 8x 10/100/1000 Base-T ports | 9. Redundant power supplies |
| 5. Management 10/100/1000 Base-T port | |

Hyperscale Security System

With Maestro, you can start with two gateways and then can grow to up to 52 gateways. For example, when you start with 3.6 Gbps using two 6200HS gateways you can finish with a 90 Gbps security solution. Simply by using Check Point Maestro.

Hyperscale Orchestrator Connections

When a Security Group is created, an IP address is created for a Single Management Object connection to the security management server. Easily create and assign IP addresses to the internal and external network interfaces. These uplinks are the visible components of the Maestro security solution.

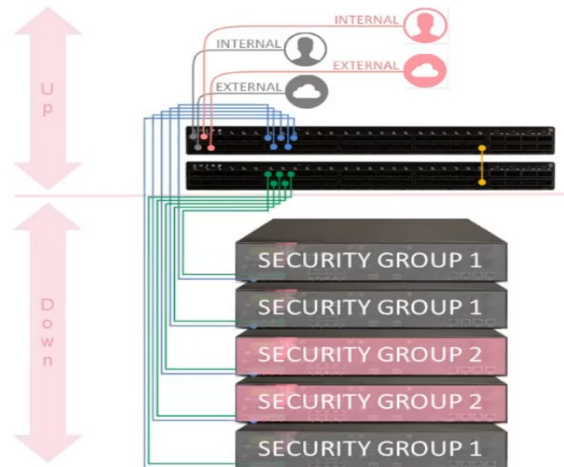

Fully Operational within Minutes

When we add a gateway to the system, it gets all the configurations, the policy, even the software version, updated and aligned with the existing deployment, ready to go within 6 minutes.

Maestro Traffic Distribution

HyperSync tracks the Active/Standby/Backup state of group members. Sync traffic is limited to only the Active and Standby members handling the connection.

Cost-Efficient N+1 Deployments

Now businesses of all sizes can enjoy cloud-level resiliency and telco-grade technology using the efficient Maestro N+1 clustering design.

SPECIFICATIONS

Performance

Enterprise Test Conditions

Threat Prevention (Gbps) ¹	1.8
NGFW (Gbps) ²	3.72
IPS (Gbps)	4.65
Firewall (Gbps)	9

RFC 3511, 2544, 2647, 1242 Performance (Lab)

Firewall 1518B UDP (Gbps)	17.55
VPN AES-128 (Gbps)	2.57
Connections/sec	67,000
Concurrent connections	2/4/8M

1. Includes Firewall, Application Control, URL Filtering, IPS, Antivirus, Anti-Bot and SandBlast Zero-Day Protection with logging enabled. 2. Includes Firewall, Application Control and IPS with logging enabled.

Additional Features

Highlights

- 4x 10 GbE SFP+ ports
- 1x CPU, 2 physical cores, 4 virtual cores
- 1x 240 GB SSD
- 2x AC power supplies
- 16 GB memory
- Virtual Systems (Plus/max mem): 20/20

Content Security

First Time Prevention Capabilities

- CPU-level, OS-level and static file analysis
- File disarm and reconstruction via Threat Extraction
- Average emulation time for unknown files that require full sandbox evaluation is under 100 seconds
- Maximal file size for Emulation is 100 MB
- Emulation OS Support: Windows XP, 7, 8.1, 10

Applications

- Use 10,000+ pre-defined or customize your own applications
- Accept, prevent, schedule, and apply traffic-shaping

Data Loss Prevention

- Classify 700+ pre-defined data types
- End user and data owner incident handling

Dynamic User-based Policy

- Integrates with Microsoft AD, LDAP, RADIUS, Cisco pxGrid, Terminal Servers and with 3rd parties via a Web API
- Enforce consistent policy for local and remote users on Windows, macOS, Linux, Android and Apple iOS platforms

Network

Network Connectivity

- Total physical and virtual (VLAN) interfaces per appliance: 1024/4096 (single gateway/with virtual systems)
- 802.3ad passive and active link aggregation
- Layer 2 (transparent) and Layer 3 (routing) mode

High Availability

- Active/Active L2, Active/Passive L2 and L3
- Session failover for routing change, device and link failure

IPv6

- NAT66
- CoreXL, SecureXL

Unicast and Multicast Routing (see SK98226)

- OSPFv2, BGP, RIP
- Static routes, Multicast routes
- Policy-based routing
- PIM-SM, PIM-DM, IGMP v2, and v3

Maestro

Maximums

- Up to 8 Security Groups
- Up to 31 gateways in a Security Group
- Up to 28 gateways in a Security Group (dual site deployment, 14 from each site)
- 48x 10 GbE and 8x 100 GbE ports (MHO 140)

Physical

Power Requirements

- Power Supply rating: 150W
- AC power input: 100 to 240V (50-60Hz)
- Power consumption avg/max: 83W/113W
- Maximum thermal output: 385.6 BTU/hr.

Dimensions

- Enclosure: 1RU
- Dimensions (WxDxH): 17.2 x 20 x 1.73 in. (438 x 508 x 44mm)
- Weight: 16.5 lbs. (7.5 kg)

Environmental Conditions

- Operating: 0° to 40°C, humidity 5% to 95%
- Storage: -20° to 70°C, humidity 5% to 95% at 60°C

Certifications

- Safety: UL, CB, CE, TUV GS
- Emissions: FCC, CE, VCCI, RCM/C-Tick
- Environmental: RoHS, WEEE, REACH¹, ISO14001¹ factory certificate

ORDERING QUANTUM 6200HS MAESTRO SOLUTIONS

MAESTRO HYPERSCALE SOLUTION PACKAGES	SKU
Maestro Solution with two 6200 firewalls with SandBlast subscription package for 1 year and one Orchestrator (MHO-140). Each appliance includes 16 GB RAM, 10x 1GbE copper on-board, 4x 10GbE fiber, 2x AC PSUs, 1x 240 GB SSD, LOM, plus 2x 10G DAC cables (3m, 3m). MHO-140 includes 1x 10G DAC (3m).	CPAP-MHS-6202-PLUS-SNBT
Maestro Solution with three 6200 firewalls with SandBlast subscription package for 1 year and one Orchestrator (MHO-140). Each appliance includes 16 GB RAM, 10x 1GbE copper on-board, 4x 10GbE fiber, 2x AC PSUs, 1x 240 GB SSD, LOM, 2x 10G DAC cables (3m, 3m). MHO-140 includes 1x 10G DAC (3m).	CPAP-MHS-6203-PLUS-SNBT

SECURITY GATEWAY APPLIANCES FOR SCALE-UP	SKU
6200 security gateway for Maestro including 16 GB RAM, 10x 1GbE copper on-board, 4x 10GbE fiber, 2x AC PSUs, 1x 240 GB SSD, LOM, 2x 10G DAC cables (3m, 3m) with SandBlast subscription package for 1 year.	CPAP-SG6200-PLUS-MHS-SNBT
SECURITY GATEWAY ACCESSORIES	SKU
Direct Attach Copper (DAC) cables 10GbE SFP+ to SFP+, 3M	CPAC-DAC-10G-3M
Memory upgrade kit from 16GB to 32GB for 6200 appliances	CPAC-RAM16GB-6200
Lights-Out Management Module	CPAC-NLOM-C
Extended slide rails for 6200 Security Gateways (24" - 36")	CPAC-RAILS-EXT-6000/6200

MAESTRO HYPERSCALE ORCHESTRATOR	SKU
Maestro Hyperscale Orchestrator 140 with 8x 100 GbE and 48x 10 GbE ports, plus 1x 10G DAC (3m).	CPAP-MHO-140
MAESTRO HYPERSCALE ORCHESTRATOR ACCESSORIES	SKU
Fan replacement for Maestro Hyperscale Orchestrator 140	CPAC-FAN-MHO140
AC power supply unit replacement for Maestro Hyperscale Orchestrator 140 and 170	CPAC-PSU-AC-MHO140/170
Rail kit for Maestro Hyperscale Orchestrators 140 and 170	CPAC-RAIL-MHO140/170

MHO-140 TRANSCEIVERS	SKU
100G CWDM4, LC connector, 2Km/ single mode fiber	CPAC-TR-100CWDM4
100G SWDM4, LC connector, 75m/OM3 fiber	CPAC-TR-100SWDM4
QSFP28 transceiver module for 100G fiber ports - short range (100GBase-SR4)	CPAC-TR-100SR
QSFP28 transceiver module for 100G fiber ports - long range (100GBase-LR4)	CPAC-TR-100LR
QSFP+ transceiver for 40G fiber Ports - short range (40GBase-SR) OM3 fiber 100m, OM4 fiber 150m	CPAC-TR-40SR-QSFP-100m
QSFP+ transceiver module for 40G fiber ports - short range (40GBase-SR)	CPAC-TR-40SR-QSFP-300m
QSFP+ transceiver module for 40G fiber ports - long range (40GBase-LR)	CPAC-TR-40LR-QSFP-10Km
Bi-directional QSFP transceiver for 40G fiber Ports - short range (40GBase-SR-BD)	CPAC-TR-40SR-QSFP-BIDI
QSFP+ splitter for 40G fiber ports for Maestro (MHO140 and MHO170) - 3 meters	CPAC-TR-40SPLIT-QSFP-3M **
QSFP+ splitter for 40G fiber ports for Maestro (MHO140 and MHO170) - 6 meters	CPAC-TR-40SPLIT-QSFP-6M **
SFP28 transceiver module for 100G fiber ports - short range (25GBase-SR SFP28)	CPAC-TR-25SR-C
SFP28 transceiver module for 100G fiber ports - long range (25GBase-LR SFP28)	CPAC-TR-25LR-C
SFP+ transceiver module for 10G fiber ports - for links up to 40km (10GBASE-ER)	CPAC-TR-10ER-C
SFP+ transceiver module for 10G fiber ports - long range up to 10km (10GBase-LR)	CPAC-TR-10LR-C
SFP+ transceiver module for 10G fiber ports - short range (10GBase-SR)	CPAC-TR-10SR-C
SFP+ transceiver 10GBASE-T RJ45 (Copper) - for links up to 30m over CAT6a/CAT7	CPAC-TR-10T-C
SFP transceiver module for 1G fiber ports - short range (1000Base-SX)	CPAC-TR-1SX-C
SFP transceiver module for 1G fiber ports - long range (1000Base-LX)	CPAC-TR-1LX-C
SFP transceiver to 1000 Base-T RJ45 (Copper)	CPAC-TR-1T-C

* In the R81.20 software release and later, the MHO-140 1/10G interfaces support 25G transceivers, ** It is recommended to use the CPAC-TR-40SR-QSFP-100m when using the splitters CPAC-TR-40SPLIT-QSFP-3M or CPAC-TR-40SPLIT-QSFP-6M

ORDERING MAESTRO SOLUTIONS (Continued)

All-inclusive Security

	NGFW	NGTP	SNBT (SandBlast)
	Basic access control with IPS	Prevent known threats	Prevent known and zero- day attacks
Firewall	✓	✓	✓
VPN (IPsec)	✓	✓	✓
Mobile Access	✓	✓	✓
Identity Awareness	✓	✓	✓
Application Control	✓	✓	✓
Content Awareness	✓	✓	✓
IPS	✓	✓	✓
URL Filtering		✓	✓
Anti-Bot		✓	✓
Anti-Virus		✓	✓
Anti-Spam		✓	✓
DNS Security		✓	✓
SandBlast Threat Emulation			✓
SandBlast Threat Extraction			✓
Zero Phishing			✓

Each gateway requires a license for the enabled security feature. The first-year purchase includes the SNBT package. Security subscription renewals, NGFW, NGTP and SNBT are available for subsequent years.